


**YOUR** FINISHING PARTNER

# LEMORAU SMART-L

## Compact Digital Finishing Machine

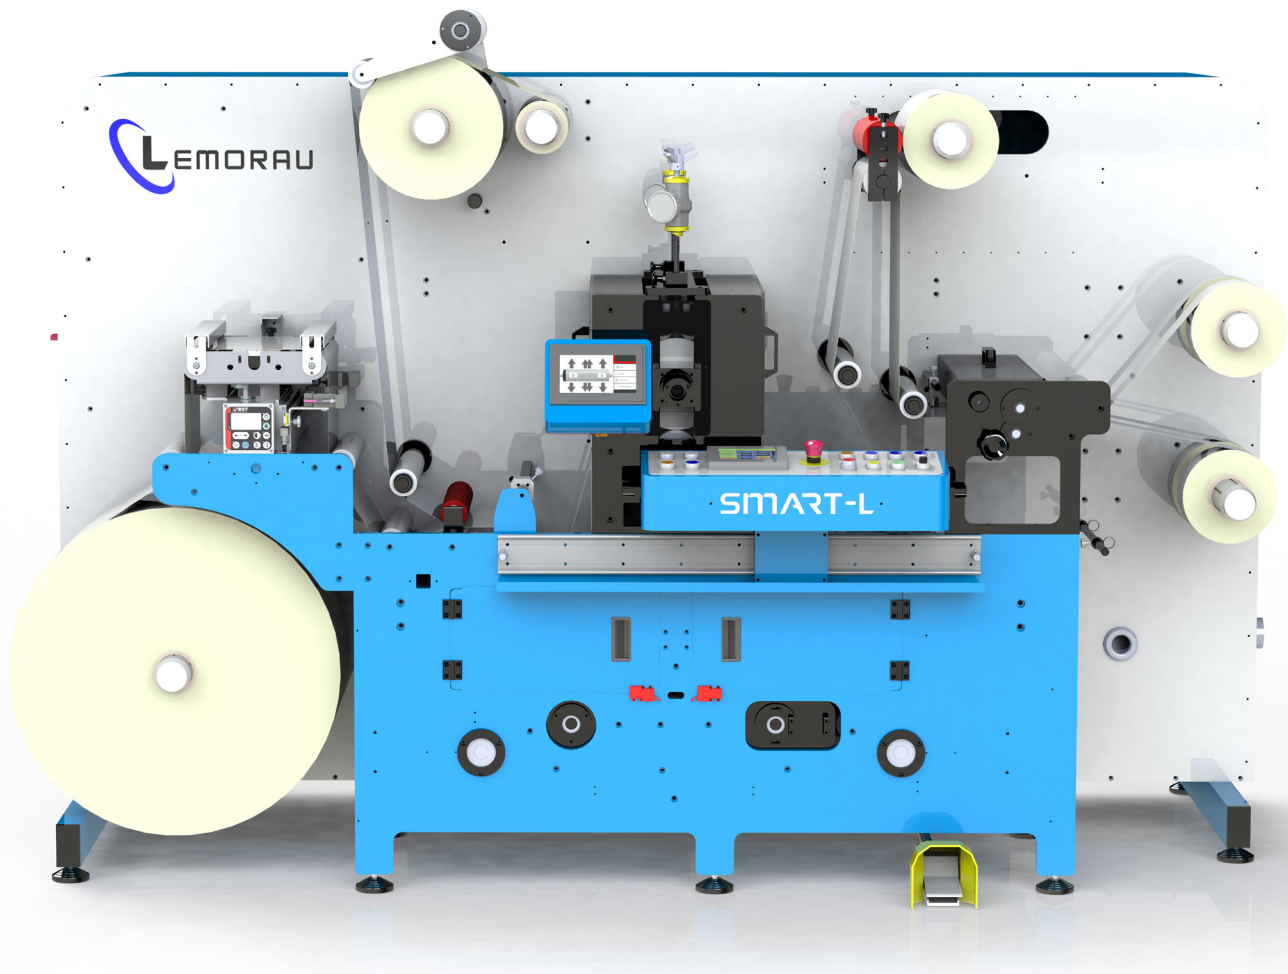

## SPECIFICATIONS

- ▶ Max. rotary speed for blank labels: 200 m/min. (656 ft/min.)
- ▶ Max. rotary speed die cutting to register: 120 m/min. (394 ft/min.)
- ▶ Max. semi-rotary speed die cutting to register: 40 m/min. (131 ft/min.) with intelligent speed limit according to repeat
- ▶ Web width 250, 330, 400, 450 mm, other sizes (10, 13, 16, 18", other sizes)
- ▶ Electronic Counter (Labels/ Meters/ Rolls/ Total meters and labels Counter / Information of actual diameter)
- ▶ 250 Job memory for easy and quick job set ups
- ▶ Paper and matrix break detection
- ▶ QRC (Quick Remote Connection)- For fast and easy access to the machine remotely
- ▶ Automatic web tension control system by servo motors - Constant and Taper tension
- ▶ Foot pedal to jog the machine
- ▶ Multi language HMI touch screen
- ▶ Electrical supply according to country/customer request (no need of transformers)
- ▶ CE conformity certificated, user manual and electrical scheme

## SPECIFICATIONS (CONT.)

### UNWINDER

- ▶ Servo driven with max. Ø 700 mm (27,5")
- ▶ Pneumatic shaft ID 76mm (3")
- ▶ Automatic stop at master roll end with programmable end of roll function
- ▶ Clockwise/counterclockwise unwinding
- ▶ Adjustable splice table with pneumatic clamps
- ▶ Electronic web guide system with ultrasonic sensor which enables guiding of opaque and clear materials

### DIE CUTTING

- ▶ Operates in full Rotary or Semi-rotary modes
- ▶ Equipped with magnetic cylinder Z130 1/8"
- ▶ Die repeats in **Rotary Mode**: 203,20 – 431,80 mm (8 – 17")
- ▶ Recommended die repeat in **Semi-Rotary Mode (Z130)**: 82,55- 330,20 mm (3,25 – 13")
- ▶ Servo driven buffer
- ▶ Deflection function for existing flexible dies in semi-rotary mode
- ▶ Easy strip waste rewinder max. Ø 600mm (24")

### DIE CUTTING EQUIPPED WITH SPEED PACK (OPTIONAL)

- ▶ Maximum semi-rotary speed 80 m/min. - Die cutting to register (dependent on plate size)
- ▶ Equipped with magnetic cylinder Z190 1/8"
- ▶ Die repeats in **Rotary Mode**: 203,20 – 603,25 mm (8-23.75")
- ▶ Recommended die repeat in **Semi-Rotary Mode (Z190 1/8")** 120,65 – 482,60 mm (4,75 – 19")

### SLITTING UNIT

- ▶ Equipped with 6 sets of circular knives with lateral adjustment - Can be added more as optional
- ▶ Air trim removal

### REWINDING

- ▶ Servo driven equipped with 2 interchangeable pneumatic rewinders
- ▶ Equipped with 6 air shafts: ID 2x25, 2x40, 2x76mm (2x1" , 2x1.57" , 2x3")
- ▶ Semiautomatic rewinding
- ▶ Clockwise/counterclockwise rewinding (labels in/ labels out)
- ▶ Max. rewinder Ø 580mm (23") using single rewinder / 350mm (14 ") using double rewinder

## OPTIONAL EQUIPMENT

- ▶ Additional mandrels in customized sizes
- ▶ Additional slitting knives
- ▶ Anvil roll with adjustable gap
- ▶ Back scorer unit
- ▶ Bearer wipers & lubrication
- ▶ Clear on clear sensor
- ▶ Linerless or with liner lamination
- ▶ Pressure gauges for die cutting unit
- ▶ Razor slitting knives
- ▶ Speed Pack Semi-rotary die cut up to 80m/min.

 YouTube





Follow us at:

